




## 3U8G Motherboard replacement SOP


1. Remove 3 screws on the top of cover and 6 screws on side of the cover

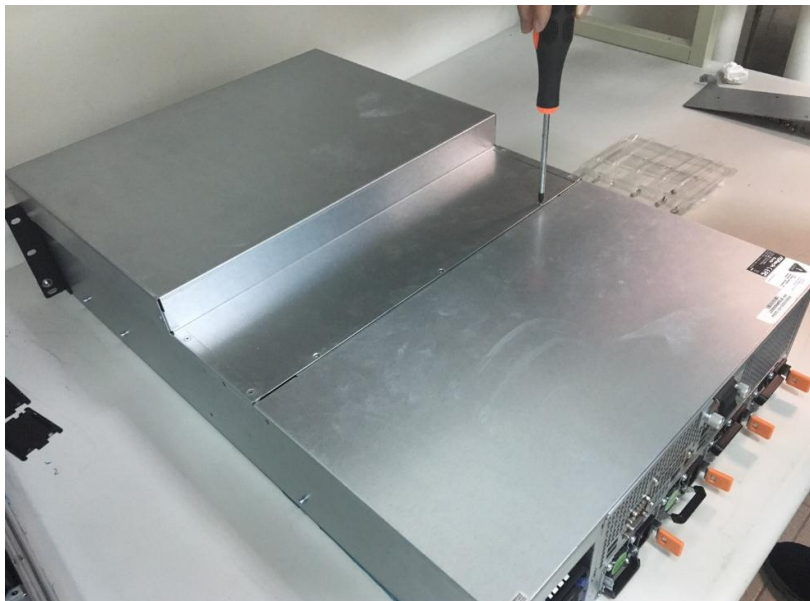

2. Remove system cover.





3. Remove all cables on the motherboard.

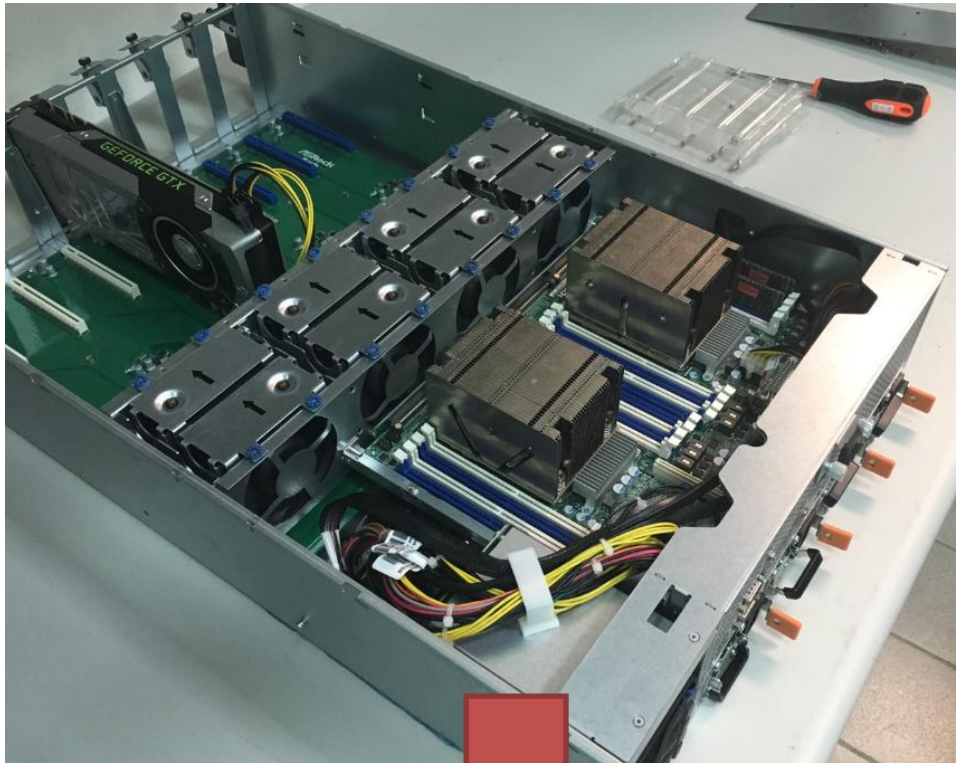




4. Loosen front knobs of motherboard tray then push the middle black button to pull tray out.

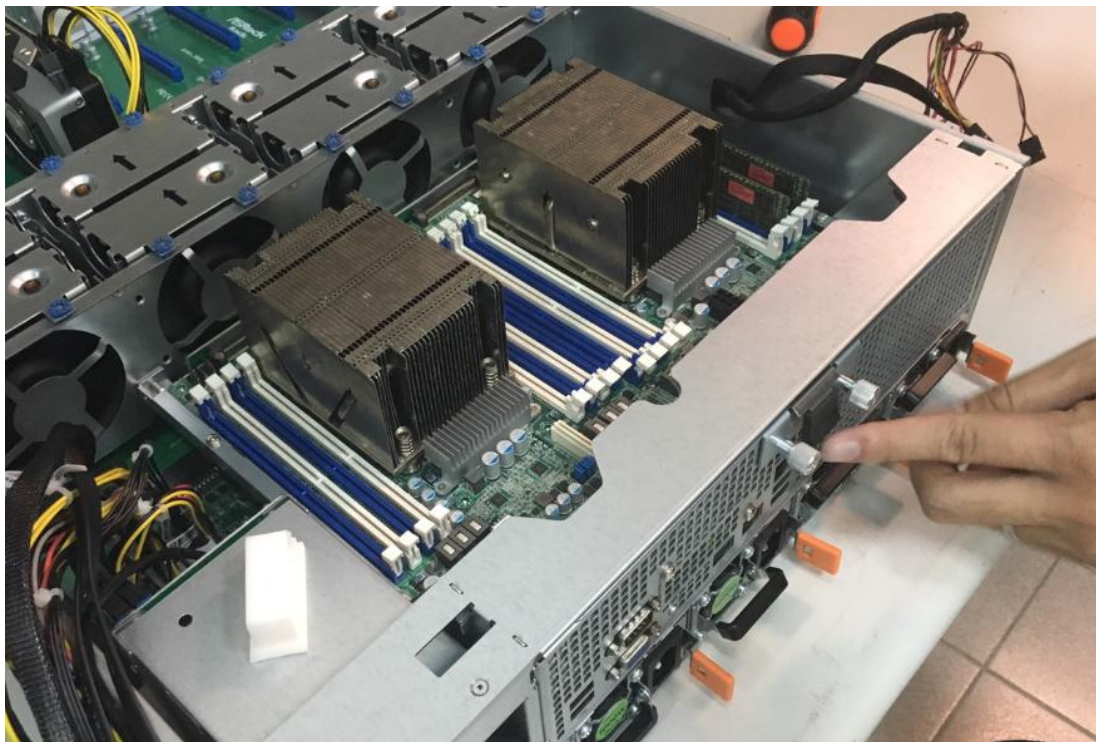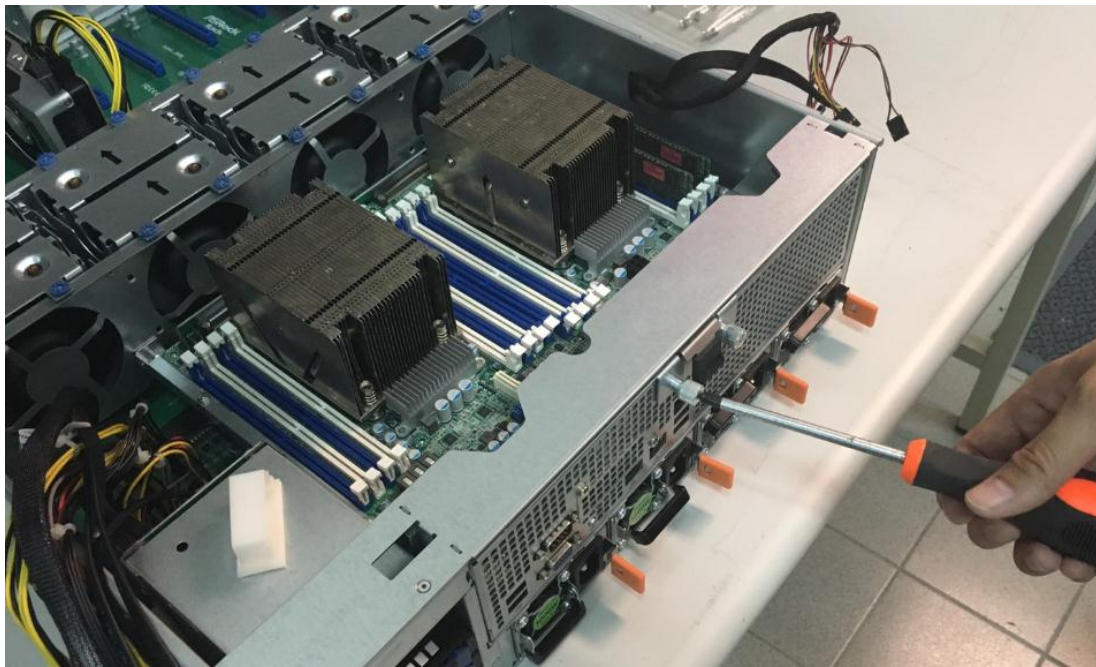


5. Remove 4 screws on side of motherboard tray.

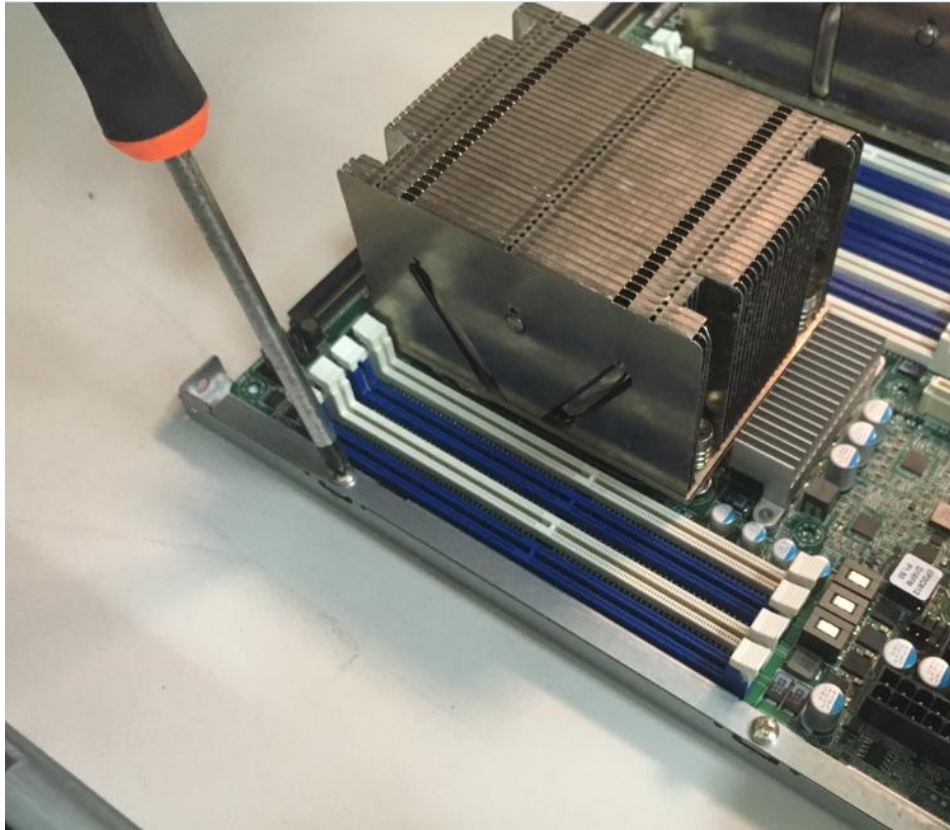


6. Remove 7 screws on motherboard then pick the motherboard up.

7. Put new motherboard into MB tray and screw 7pcs screws to fix motherboard on the tray then install CPUs and Memorys.

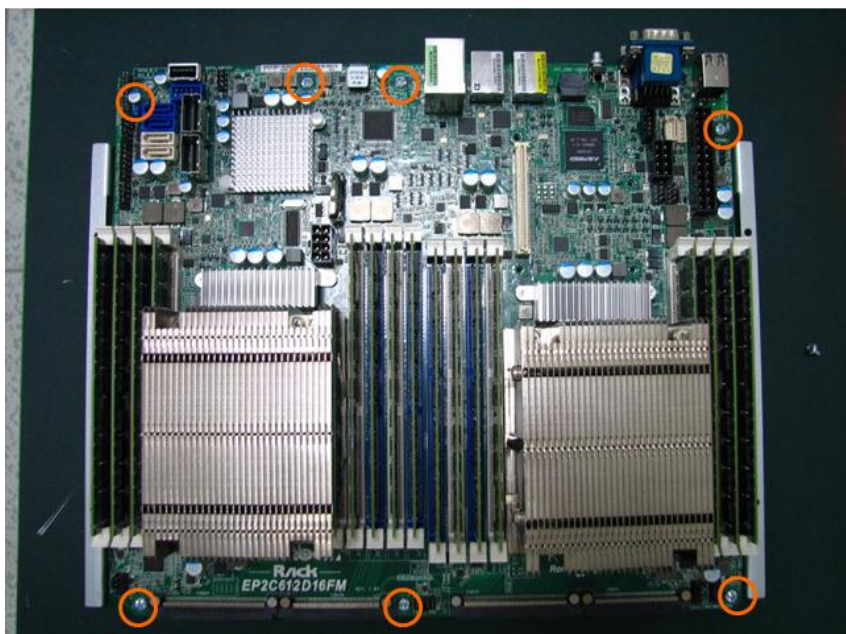




8. Put the MB tray into MB self and push by orange arrow direction to make sure the I/O connector fit in completely  
※ be care of the UID BTN fit in nicely or not
9. Once MB assembled, screw 4pcs screws at red arrow

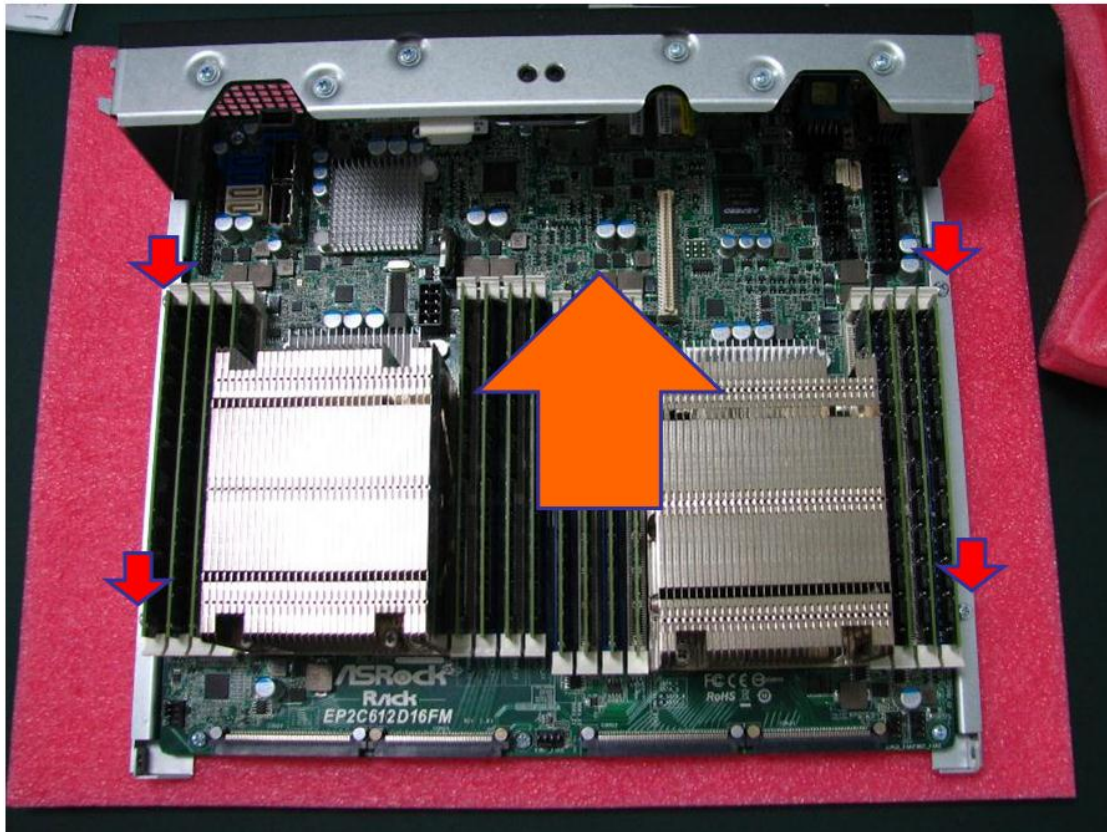


10. Once the edge of black paint touch the chassis iron part, push back the MB self handles back into the self.

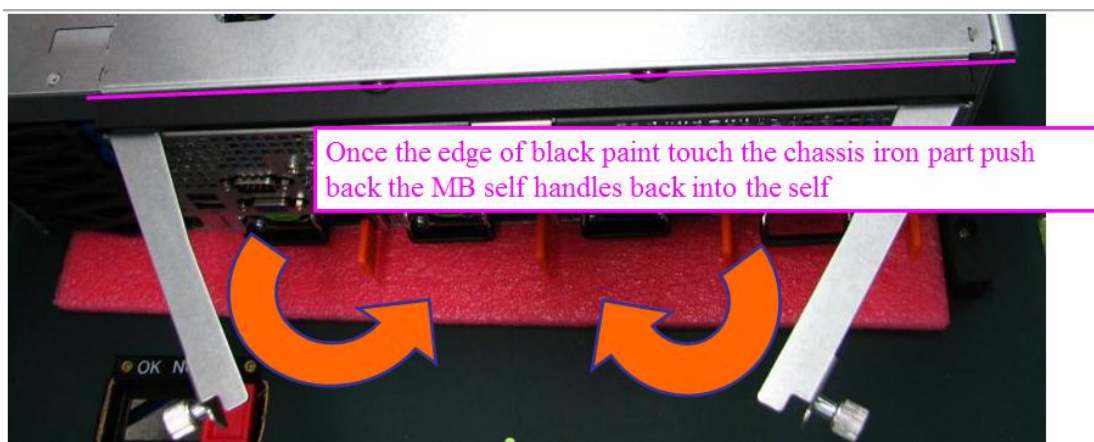

11. Pull out the two handles of MB self and push the MB self by the orange arrow direction into chassis.

Make sure the located metal column on fan cage fit into the hole on the MB self completely.


Pull out the two handles of MB self and push the MB self by the orange arrow direction into chassis

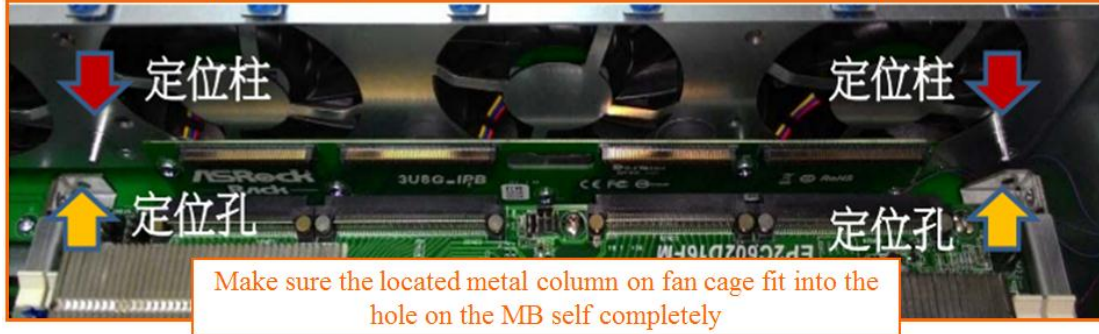

12. Once the two handles push back to MB self, please screw the screw to fix the handles.










13. Check the fan cage column go through the hole of MB self as red arrow part.  
Check 4pcs MB CONNECTOR connect to the gold finger of IPB completely at yellow arrow part

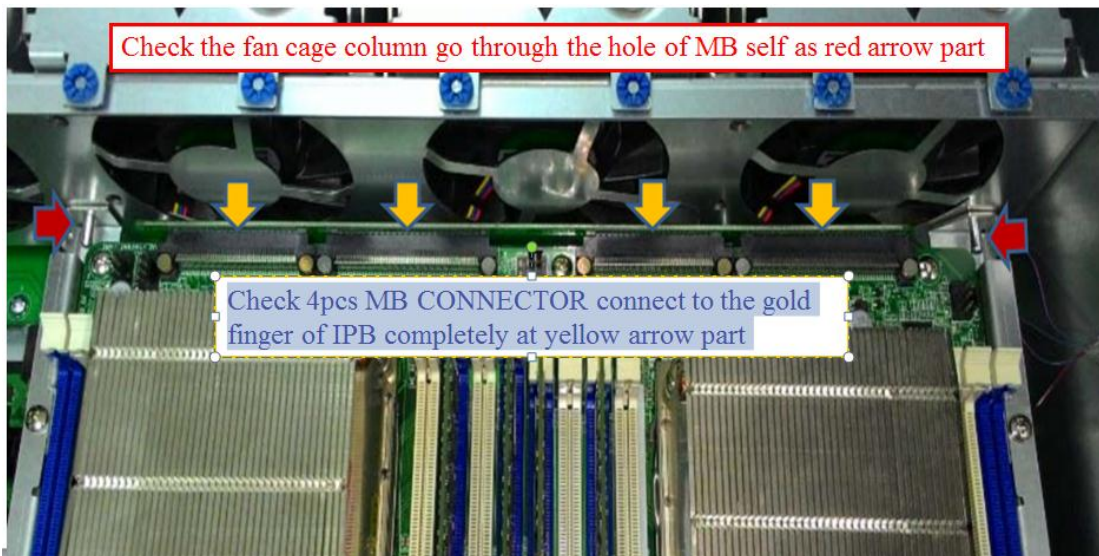




14. Insert all cables into MB by below pictures shown.

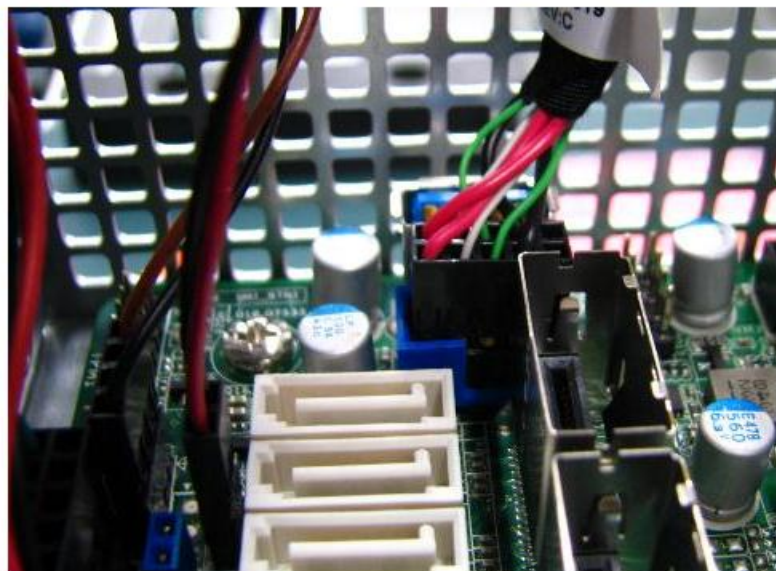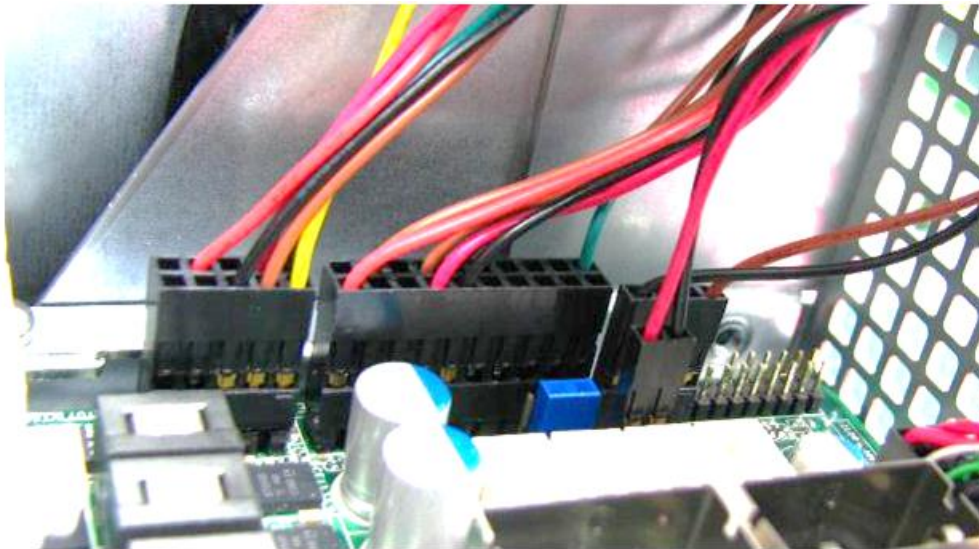


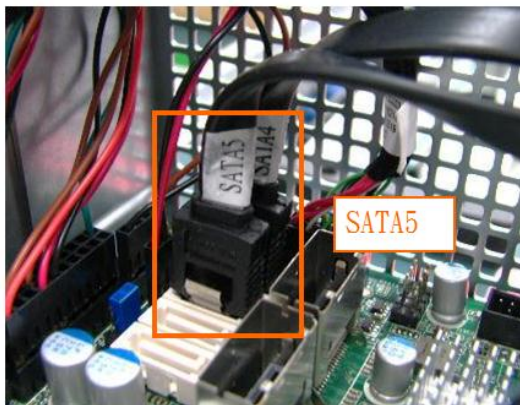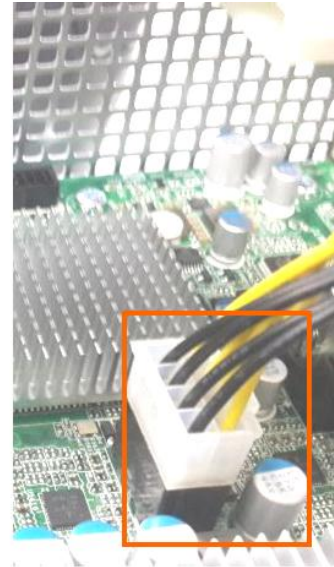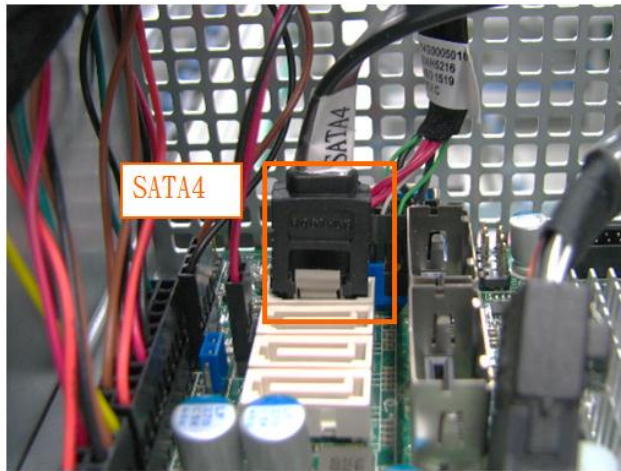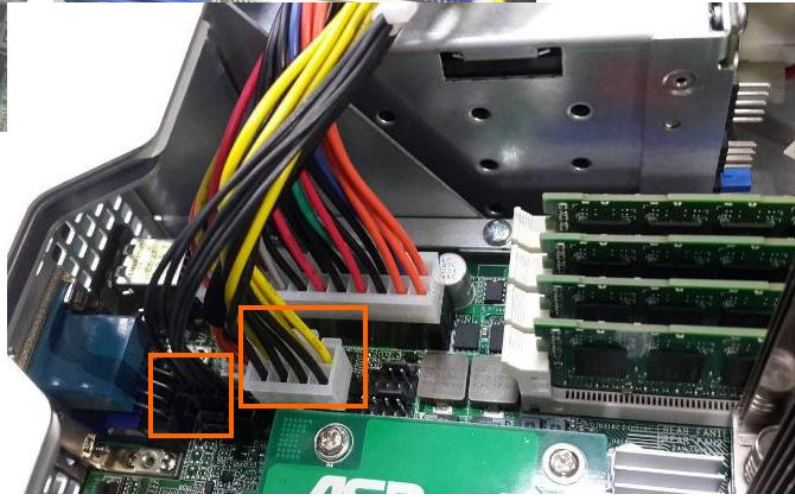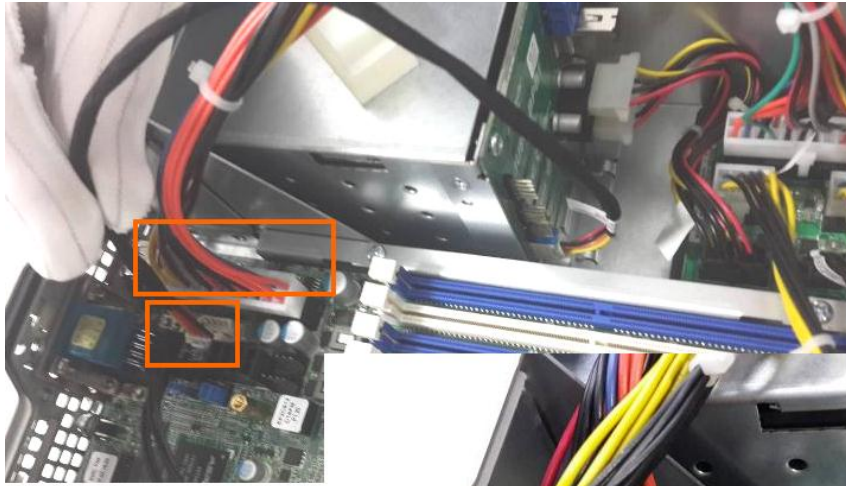





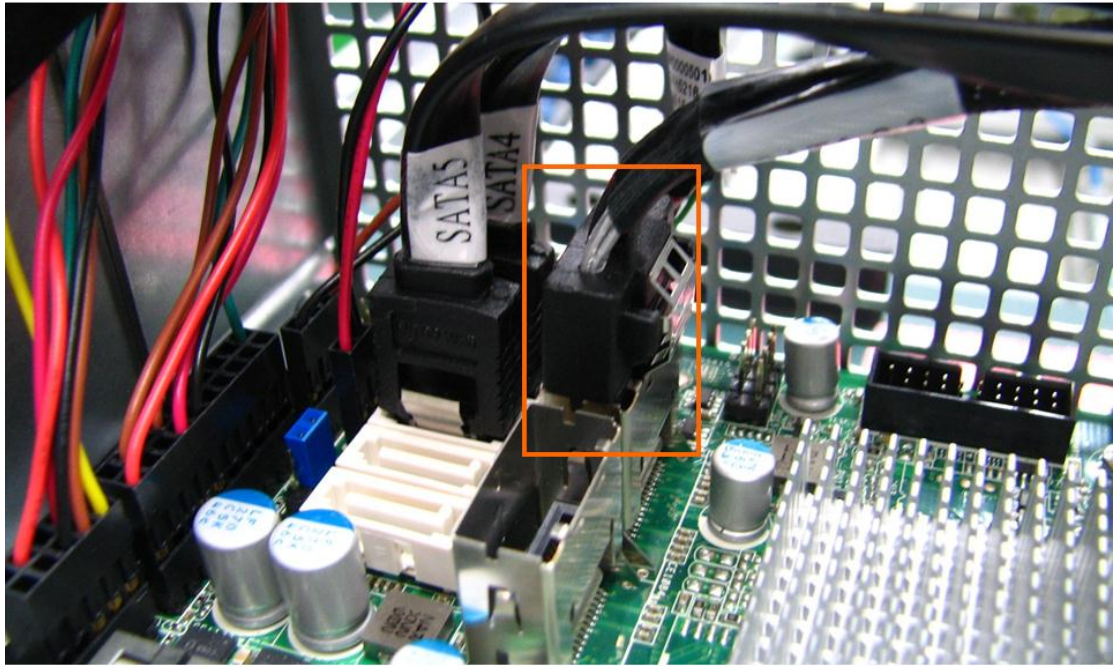

15. Put back the cover by arrow direction

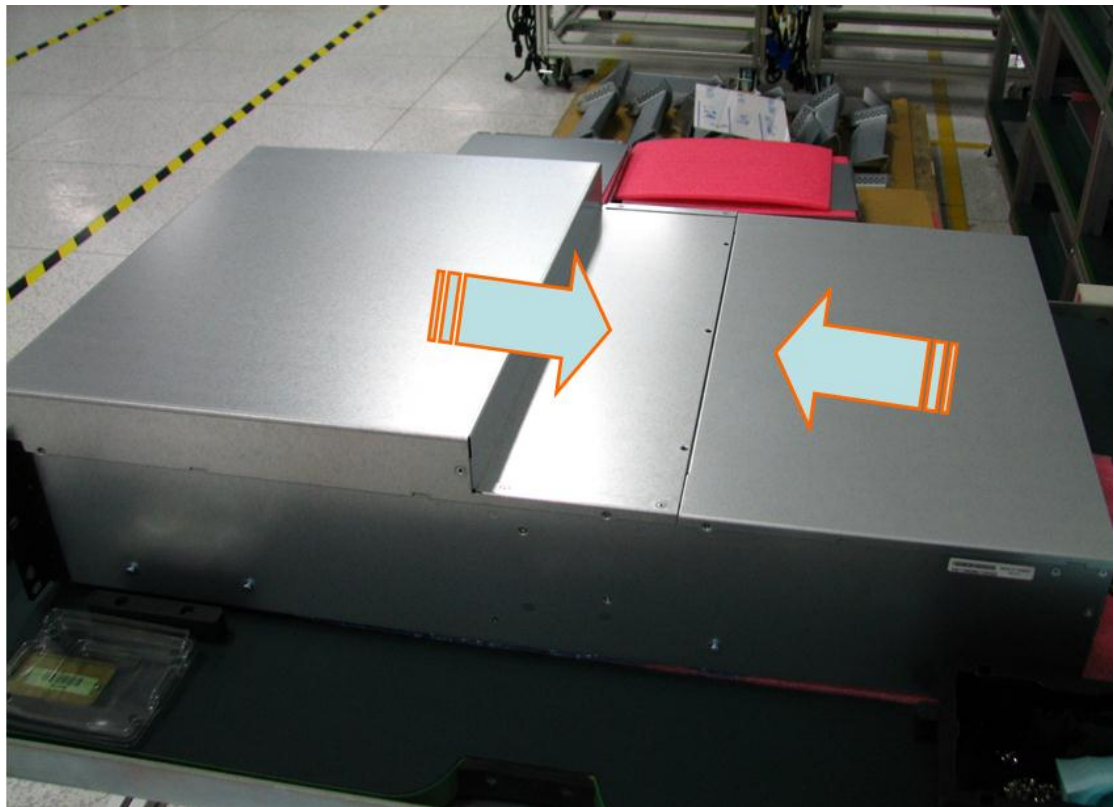

16. Screw 9 screws on the cover.

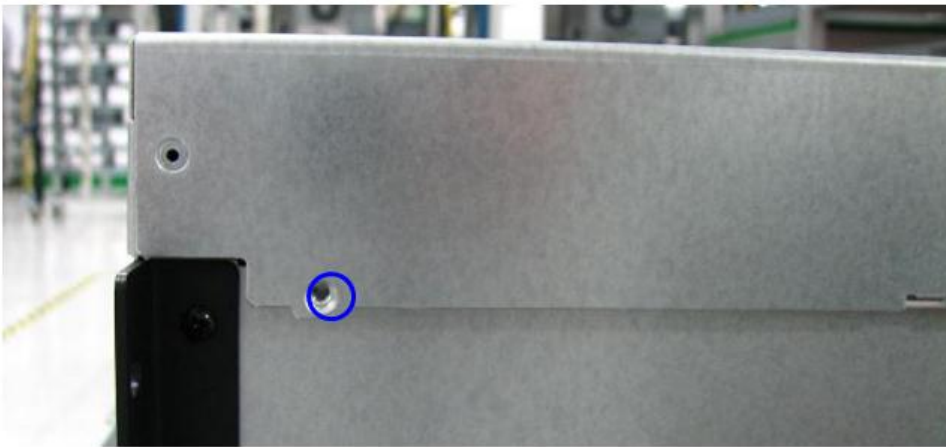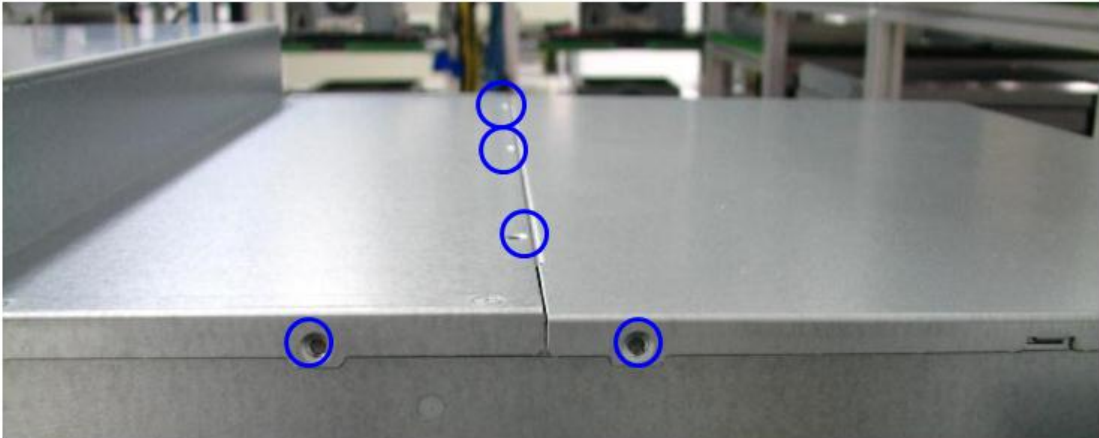

=====**Finish**=====